


MULTI VISIO

- 安定した織り組織を持つトレビラCS生地
- デジタルプリントに最適
- 有害物質を含まないエコテックス規格100の認証を取得

アプリケーション

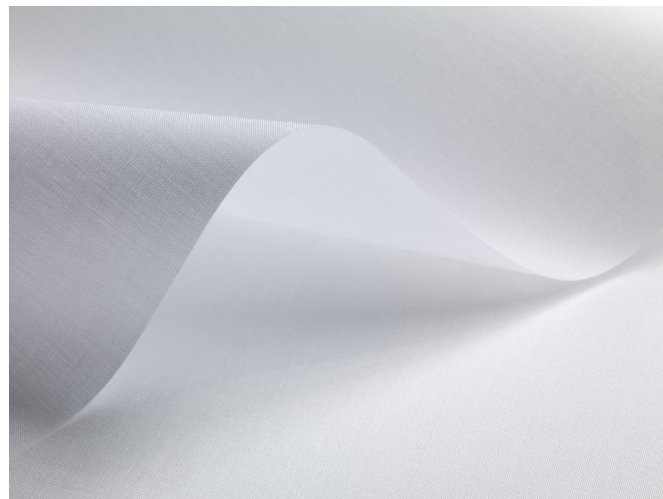

織物表示

	Semi transparent
	ポリエステル・トレビラCS
	210 g/m ²
	0.40 mm
	235 cm
	8.9 cm, 12.7 cm, 240 cm

技術特性

	6-7
	Alpha-w = 0.30
	難燃性
	湿度の高い場所でも使用可能
	デジタル印刷
	Oeko-Tex
	レーザー加工
	特別色 500 m

洗濯表示



難燃性

B-s1,d0 (EN 13501-1)
B1 (DIN 4102-1)
M1 (NF P 92-503/5/7)
Type B (BS 5867-2)
NFPA 701



Multi Visio

光学および太陽係数 (± 5%, DIN EN 410)

Colour	T _V	T _S	R _S	A _S	T _{UV}	F _C	g _{tot}
01	42.0	41.0	50.0	9.0	32.0	0.63	0.46
02	31.0	35.0	48.0	17.0	23.0	0.64	0.46
03	38.0	38.0	49.0	13.0	25.0	0.64	0.46
08	7.0	28.0	32.0	40.0	7.0	0.74	0.53
20	36.0	39.0	48.0	13.0	22.0	0.65	0.46
21	6.0	25.0	32.0	43.0	6.0	0.74	0.52
26	27.0	35.0	43.0	22.0	15.0	0.68	0.47
27	17.0	31.0	38.0	31.0	10.0	0.71	0.50
51	42.0	40.0	49.0	11.0	31.0	0.64	0.46

T_V Visible light transmission

T_S Solar transmission

R_S Solar reflectance

A_S Solar absorption

T_{UV} UV transmission

F_C Shading factor

g_{tot} Total g-value

F_C + g_{tot}: ガラスで計算した値: 0.72 / Ug = 1.6 W/m² K, DIN EN 13363-1

Multi Visio

